

# V2U TRAC TDM (Traction Decompression Mobilisation)


**Introducing the Traction Decompression System with Manual Distraction, Step Progression-Regression and Auto Slowing Feature.**

It may be used to relieve pain associated with Protruding disc, Bulging disc, Herniated discs, Degenerative disc disease, Posterior facet syndrome, Acute facet problems, Radicular pain, Prolapsed discs, Spinal root impingement, Hypomobility, Degenerative joint disease, Facet syndrome, Compression fractures, Joint pain, Discogenic pain.



## FEATURES

- Easy to use
- Active displays show all treatment parameters and progress.
- Multiple sensors and safety controls
- High strength traction rope
- Smooth, auto-slowng pull, quiet operation
- Fits almost any existing table platform
- Clinician can save up to ten treatment setups
- Adjustable Hold/Rest ten
- Continuous and Intermittent traction with multiple speed selection
- Manual control mode
- Step Progression and regression

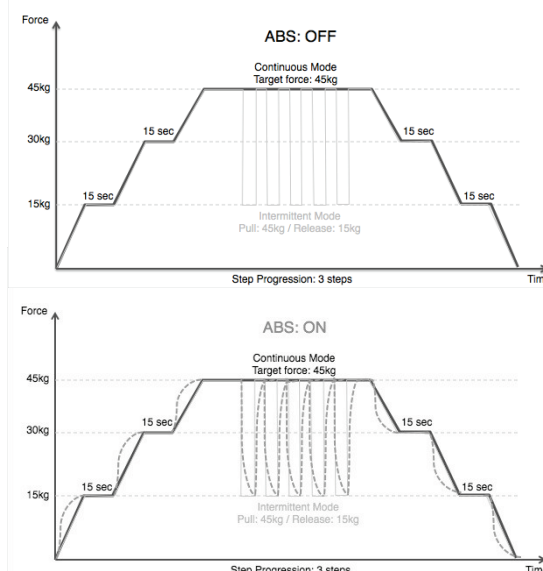

## TECHNICAL SPECIFICATIONS

Power Supply	AC 220V~240V, 50/60Hz
Power Consumption	100 VA (Max.)
Fuse	1.0 A / 250 V× 2 Slow Blow
Maximum Output Force	198 lb / 90 Kg
Output Force Tolerances	4 – 44 lb ± 2 lb 45 – 110 lb ± 3lb 111 – 198 lb ± 4 lb
Traction Speed	Fast – ~5-6 Seconds to reach 90 kg (<10 seconds) Normal – ~12-15 Seconds to reach 90 kg (<20 seconds) Slow – ~22-25 Seconds to reach 90 kg (<30 seconds)
Hold / Rest Period	1 - 99 Seconds
Treatment Time	1 - 99 minutes
Treatment Mode	Continuous / Intermittent
Security System	Error Codes E-1 - E-E
Display	Yellow / Green Digital LED Display
Patient Safety Switch	2 Pin connector, newly redesigned
Electromagnetic Compatibility	IEC 60601-1-2
Medical Device Classification	Class IIa as per MDD 93/42/EEC
Operation Temperature/Humidity	0~40°C / 10-90%RH
Storage/Transportation	-10~60°C / 10-90%RH
Atmospheric pressure	from 700 hPa to 1060 hPa
Operation Altitude	less than 3,000 meters
Dimension	L 14.2" × W 12.2" × T 9"
Net Weight	32 pounds

## PACKAGE INCLUDES

Item code	Description
1701	V2U TRAC TDM
WPC - 7561	New style patient safety switch
OCP 0160X	Traction rope with hook
OPW 0060 X	Power cord
1701 - 001	Lumbar and thoracic belt set (image on the next page)
1701 - 002	Cervical halter (image on the next page)
1701 - 003	Spreader bar (image on the next page)

## EVA TRACTION TABLE (10010)

Eva traction table is state-of-the-art traction table –suitable to bundle with most Traction Units. It provides friction free table top with four sections and offer fine adjustments to provide client the most comfortable positioning.




Eva Traction Table (10010)

### Technical specifications

- Total Dimensions: 195X70X (54-95)cm
- Height: 54cm-95cm
- Width: 70cm
- Length: 195cm
- Cushion thickness : 7cm
- Angle of Head Section: -45o to +45o
- Angle of Back Section: 00 to +45o
- Maximum Traction 23cm (between bacrest and second section)
- Adjustable angle machine mount
- Head Length: 40cm
- Longer Seat Length: 39cm
- Shorter Seat Length: 29 cm
- Backrest Length: 81cm
- Maximum Patient Weight: 225Kgs
- 50 mm Retractable Castors
- Linak Motor for Hi- Lo
- Voltage: 100-120 Volts AC or 200-240 Volts AC
- Frequency: 50/60 Hz

### Standard accessories

No.	Description
10010 - 001	Foot switch
10010 - 002	Elevating surround bar
10010 - 003	Height adjustable flexion stool
10010- 004	Removable face plug
1701 - 001	Lumbar and thoracic belt set
1701 - 002	Cervical halter
1701 - 003	Spreader bar

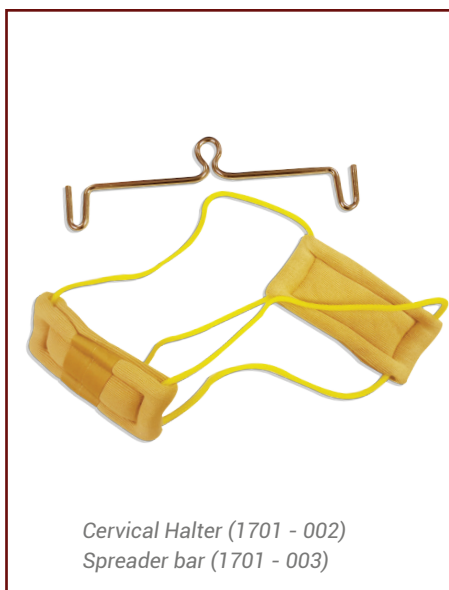

Cervical Halter (1701 - 002)  
Spreader bar (1701 - 003)



Lumbar and thoracic belt set (1701 - 001)

